

# CMTOFT

## Compact Module Two Orifice Float Trap

### Description

The Forbes Marshall Compact Module Two Orifice Float Trap, CMTOFT, has SG iron cover and base with stainless steel internals and integral automatic air venting facility .

The CMTOFT is provided with two orifices operated by single float. For normal running condensate load single orifice opens and with increase in condensate load opens the second orifice. This modulating mechanism makes this trap to cope up efficiently the condensate load at startup, normal running and peak load conditions. CMTOFT is provided with other inbuilt features - upstream and downstream isolation valves, bypass valve, non-return valve, automatic air venting, steam lock release and strainer. Trap monitoring sensor port is provided to monitor the trap with Forbes Marshall steam trap monitoring system.

CMTOFT is supplied with horizontal flanged connections and can be maintained without disturbing the pipework.

### Sizes and Pipe Connections

DN15 and DN20 Flanged CLASS 300.

DN15 and DN20 Flanged PN10, PN16

### Certification

This product is available with manufacturers typical test report.

**Note:** All certification / inspection requirements must be stated at the time of order placement.

### Available Options

Optional steam lock release (SLR) feature is provided in addition to the standard air vent. For further information please consult Forbes Marshall.

### Limiting Conditions for : CLASS 300 Flanged End

PMA - Maximum allowable pressure	17 bar g @ 220°C	
TMA - Maximum allowable temperature	220°C	
Minimum allowable temperature	-10°C	
PMO - Maximum operating pressure	15 bar g	
TMO - Maximum operating temperature	220°C	
Minimum operating temperature	0°C	
Δ PMX	Maximum CMT	4.5 bar g
	differential CMT	10 bar g
	pressure CMT	15 bar g
Maximum cold hydraulic test pressure 22.5 bar g		

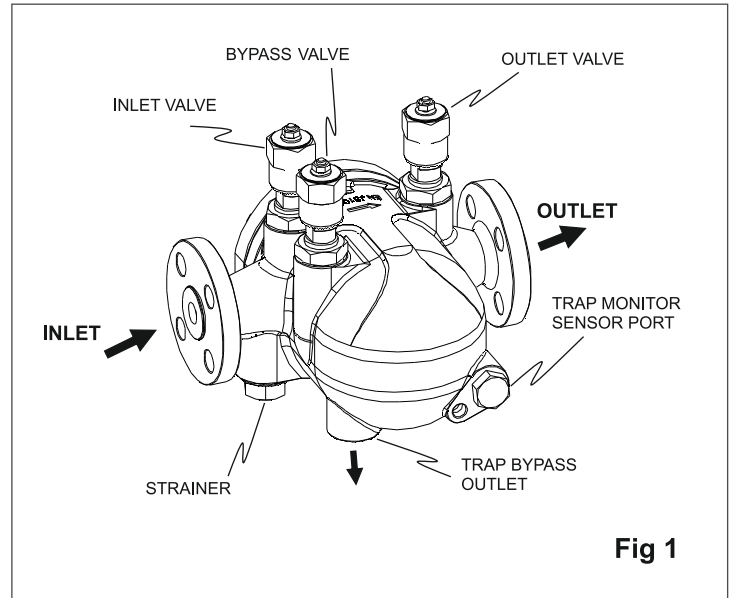


Fig 1

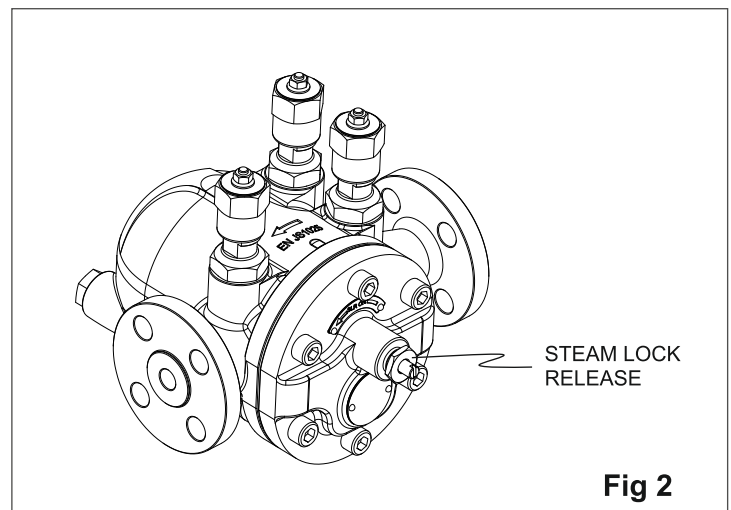



Fig 2

### Body design conditions for PN10 Flanged Ends


Maximum allowable pressure	10 bar g at 38°C
Maximum operating pressure	10 bar g at 184°C
Maximum operating temperature	220°C at 5.6 bar g
Maximum Hydraulic pressure	15 bar g
Maximum differential pressure ΔPMX	4.5bar g/ 10bar g

### Body design conditions for PN16 Flanged Ends


Maximum allowable pressure	16 bar g at 38°C
Maximum operating pressure	16 bar g at 204°C
Maximum operating temperature	220°C at 9.1 bar g
Maximum Hydraulic pressure	24 bar g
Maximum differential pressure ΔPMX	4.5 bar g/ 10 bar g/ 15 bar g

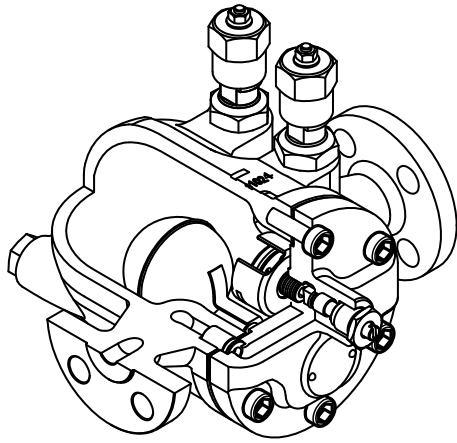

WITH SLR AND AIR VENT

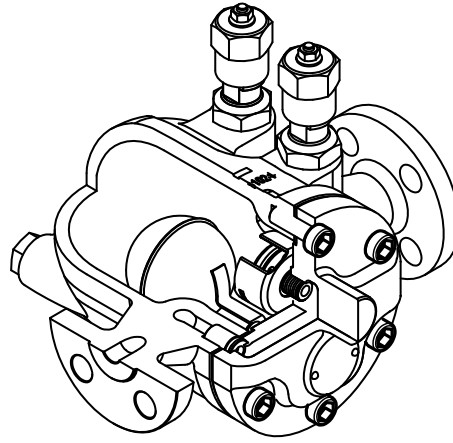

WITH AIR VENT



STRAINER

FIG - 3

### Materials

No.	Part	Material	Standard
1	Base	SG iron	ENJS 1025
2	Cover bolts	Carbon steel chromium plated	ASTM A193 B8
3	Cover gasket	Reinforced exfoliated graphite	-
4	Cover	SG iron	ENJS 1025
5	Seat	Stainless steel CA40	ASTM A743
6	Seat gasket	Reinforced exfoliated graphite	-
7	Seat screws	Stainless steel SS304	ASTM A276
8	Float and lever assembly	Stainless steel SS304	ASTM A240
9	Secondary lever assembly	Stainless steel SS304	ASTM A240
10	Pivot pin	Stainless steel SS304	ASTM A276
11	Air vent assembly	Stainless steel Ss304	-
12	NRV assembly	Stainless steel type 431	ASTM A276
13	Valve assembly	Stainless steel	-
14	Valve sealing ring	Graphite	-
15	Valve Stem-piston	Stainless steel type 316	ASTM A276
16	Valve plain washer	Stainless steel SS304	ASTM A240
17	Bonnet	Stainless steel SS420	ASTM A276
18	Lock Nut M22x1.5	Stainless steel SS304	ASTM A276
19	Hex Knob	ASTM A 108 GR 1018/1020	
20	M6 washer	Stainless steel SS304	ASTM A240
21	Cleeve lock nut	AISI 1010 Gr 8	-
22	SLR Stem	Stainless steel Ss316	ASTM A276
23	Strainer cap	Stainless steel type ANC2	BS 3146 PART2
24	Strainer Screen	Stainless steel SS304	ASTM A240
25	Spacer	Stainless steel SS410	ASTM A276
26	3/8" BSP plug	Stainless steel SS304	-
27	SLR glands	Graphite	-
28	SLR gland nut	Stainless steel type 304	ASTM A276

## Dimensions and Weights (approx.) in mm and kg

Size	A	B	C	D	E	F	G	W(kg)
Dn15	205	218.5	83	122	210	18	150	10
Dn20	205	221.5	83	122	210	18	150	10.7



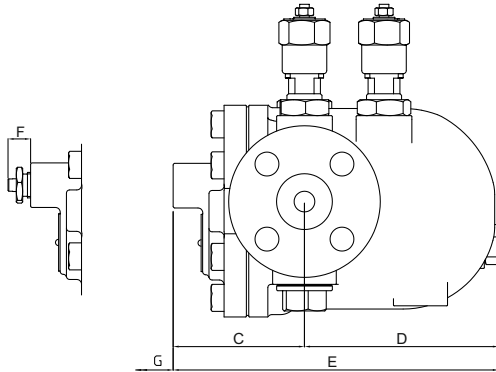


FIG - 4

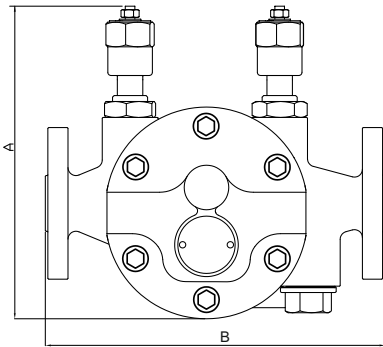

## Operating range

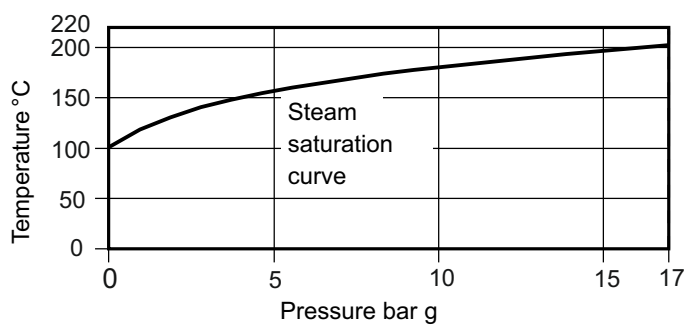


## Safety Information, Installation and Maintenance

For full details see the user manual supplied with the product.

## Installation Note

The CMTOFT must be installed with the direction of flow as indicated on the body, and with the float arm in a horizontal plain so that it rises and falls vertically. The arrow on the nameplate must point downwards

## Capacity Chart

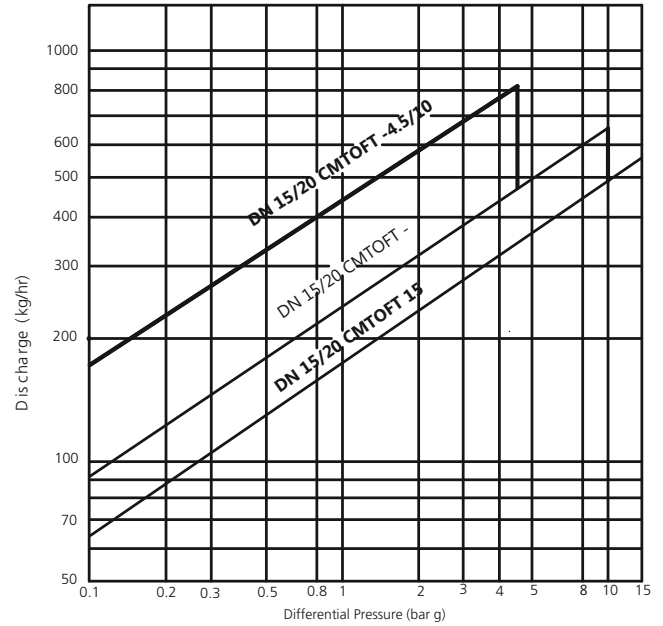

Capacities shown are based on condensate at saturation temperature. When discharging sub-cooled condensate the air vent provides extra capacities. Under start-up conditions when the condensate is cold the internal thermostatic air vent will be open and provides additional capacity to the main valve. On 4.5 bar g units this will provide a minimum of 25% increased capacity above the hot condensate figures shown. On 10 and 15 bar g units this will be minimum increase of 40% on the published capacity.

## How to Order

Example: DN15 Compact Module Two Orifice Float Trap, Flanged ASA300 CMTOFT-4.5 bar g differential pressure with steam lock release

## Recommended Tightening Torques

Item	Or mm	Nm
2	M10 x 25L	47 - 50
7	M4 x 12L	6 - 7
22 & 21	M6	2 - 3
11	17 A/F M12	50 - 55
26	24 A/F 3/8" BSP	50 - 55
18	30 A/F	100 - 110
23	25 A/F M28	120 - 125

## Disposal

This product is recyclable. No ecological hazard is anticipated with the disposal of this product provided due care is taken.

